



Experience Communication in High Definition

LifeSize® Team 200™

LifeSize® Team 200™ - enhanced HD communications for workgroup conferencing



Feature Rich High Definition Video

LifeSize Team 200 is the next step in workgroup video communications. In a single, easy-to-use system, you get the three major benefits that LifeSize delivers:

- Superior quality
- Unique flexibility
- Unmatched price/performance

Technology is just the starting point for an improved communications experience. With LifeSize Team 200, you get True HD video quality (720p30) for natural, realistic interactions. You get unparalleled ease of use and flexibility for workgroups with dual high definition display and camera support, digital input and output connections, an embedded multi-point control unit (MCU) and dual microphones.

Committed to open architecture, LifeSize systems are standards-based, providing seamless interoperability into your existing infrastructure. And you get unmatched price performance for a video communications experience that turns ROI into a winning business proposition.

Outside-the-box working experience.

Beyond technologies, over and above service and support, there's the proven enrichment in workgroup efficiency that LifeSize Team 200 offers. LifeSize designs video communications solutions with absolute user simplicity in mind. This is the face-to-face communications experience to rely on when you need to get decisions made quickly and confidently.

LifeSize Team 200 proves once again that the LifeSize difference is the LifeSize experience: Superior video communications across cities, across countries, across continents.

LifeSize Team 200 Key Features

Video Quality High Definition 1280x720 - 30 fps 16x9 format

HD Monitors



HD Cameras Pan-Tilt-Zoom (PTZ)



HD Audio



External Audio & Video Input/Output

Audio: 4 in, 2 out Video: 3 in, 2 out

Point-to-Point HD Video Communications



Embedded Continuous Presence (CP) HD Multipoint



Product Specifications - LifeSize® Team 200™

System Components

LifeSize codec with stand
High Definition PTZ LifeSize Camera
LifeSize Phone or LifeSize MicPod
New wireless remote control
Power Supply
Cables

System Configurations

LifeSize codec, LifeSize Camera, Dual LifeSize MicPod
LifeSize codec, LifeSize Camera, LifeSize Phone

Communications

128Kbps – 4.0Mbps (point-point)
128Kbps – 1.5Mbps (multipoint, per call)
H.323, SIP
1xRJ-45 Network LAN (10/100 Mbps)
1xRJ-45 for LifeSize Phone (PoE supported)
1xRJ-45 for LifeSize Networker (PoE supported)
1xRJ-11 for analog telephone line
1x3.5mm Mic In for LifeSize MicPod

Support for Multiple Displays

Support for single or dual monitor displays
Any display supporting HDMI or DVI-I input up to 720p30 (1280x768)
For additional information on displays, visit:
www.lifesize.com/support

High Definition 720p PTZ Camera

LifeSize-designed high definition pan/tilt/zoom camera (patent pending)
Maximum Resolution: 1280 x 720, 30fps
Support for multiple high definition cameras
Wide-angle zoom lens with 70 degree field of view
4x Optical Zoom / 4x Digital Zoom
Auto focus
Automatic gain control
10 camera presets (near or far end)
7.5 M / 25 ft. cable, Optional 15 M / 50 ft. cable

Video Specifications/Video Resolutions

Maximum resolutions widescreen 16:9 aspect ratio
All resolutions progressive scanning
All resolutions at 30 frames per second
128Kbps (400x244pixels) Widescreen FCIF
384Kbps (768x432pixels) Cable TV
512Kbps (848x480pixels) DVD Resolution
768Kbps (1088x608pixels) 2x DVD Resolution
1 Mbps or higher (1280x720pixels) High Definition
Actual resolution depends on capability of remote end and is impacted by the quality of the communication channel

Video Standards

H.261, H.263, H.263+, H.264, and H.239 compliant
Dual streaming with video bandwidth balance

Video Formats

16:9 High Definition aspect ratio

Video Inputs (3 Inputs)

1 x High Definition Camera (720p30)
1 x HD Video In (720p30)
1 x DVI-I In (VGA enabled)

Video Outputs (2 Outputs)

1 x HD Video Out (720p30)
1 x DVI-I Video Out (720p30)

Fully Integrated, HD Audio Conference Phone

LifeSize-designed full featured conference phone doubles as the microphone for video system
16 microphones in a patent-pending Circular Array with beam forming for clear audio pickup
100Hz up to 16kHz
H.323/SIP support
Stand alone phone option using VoIP
Powered by codec directly through cable

High Definition Active Dual Microphones

Dual omni-directional microphones
LifeSize MicPod Splitter
100 Hz up to 16 kHz
Mute button
Powered by codec directly through cable
Includes LifeSize MicPod Extension cable (15M/50ft.)

Audio Features

High Definition Audio
GIPS NetEQ packet loss concealment
Full duplex for natural conversations
Echo cancellation for echo-free calls
Automatic gain control
Automatic noise reduction
MicPod or Dual MicPod support (optional)

Audio Standards

G.711, G.722, G.722.1C (Polycom® Siren 14™), G.728, G.729, MPEG4-AAC-LC

Audio Inputs (4 Inputs)

1 x RJ-45 (LifeSize Phone)
2 x Stereo Line In (3.5mm)
1 x Mic In – Two Channel (3.5mm)

Audio Outputs (2 Outputs)

1 x RJ-45 (LifeSize Phone)
1 x Stereo Line Output (3.5mm)

User Interface & Features

Context sensitive user interface
Graphical User Interface Call Manager
14 Localized languages supported
Customizable background screens
Do Not Disturb mode

Security

Flash-based Web management tool
Admin and User level password
SNMP security alerts
Ability to disable HTTP, SSH and Telnet services
H.235 encryption support including strict compliance
Kensington Lock™

Intelligent Networking Features

NAT/Firewall Traversal (H.460/SIP)
IP v4 and IPv6 support
Auto H.323 dialing
When used with LifeSize Networker:
H.320 dialing
Auto SPID detect/downspeeding

Directory and Address Book

Up to 1000 local directory entries
Save, Lock, Remove Redial List features
Missed call notification
Auto-Discovery directory lookup (patent pending)
LDAP support / H.350 compliant
Meetings Directory support
Hierarchical address book

Embedded HD Multipoint Control Unit

4-way HD CP multipoint conference
Virtual Multiway allows participant viewing control (patent pending)
H.239 multipoint support shared from any participant
Dominant Speaker support
Transcoding support
Disable multipoint option

System Management

Out of box setup via web interface and web management tool
SNMP
1 x USB (for future use)
Backup and Restore capability
JPEG Snapshots through web interface

Power

AC Voltage 100-240V, 50-60 Hz, 2.5A via external power supply

Environmental Data


Operating temperature: 0°C (32°F) to 40°C (104°F)
Operating humidity: 15% to 85%, non-condensing
Storage temperature: -20°C (-4°F) to 60°C (140°F)
Storage humidity: 10% - 90%, non-condensing

Regulatory Model Number

Model: LifeSize Team 200 = LFZ-015

For additional information: www.lifesize.com/support

Information contained in this document is subject to change without notice. LifeSize® is the registered trademark or trademark of LifeSize Communications Inc. All other trademarks are the property of their respective owners. For patents covering LifeSize® products refer to <http://www.lifesize.com/support/legal>. © Copyright 2008. All rights reserved. November 2008.

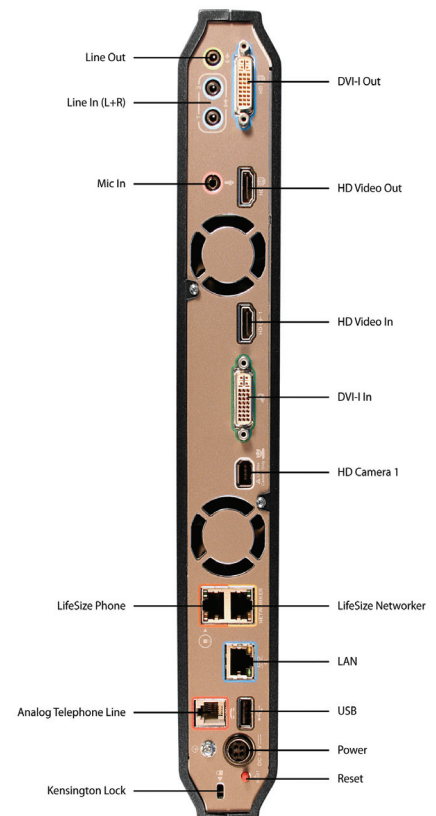

Corporate Headquarters: 901 S. Mopac Expressway Building 3, Suite 300 Austin, Texas 78746 USA
Phone: +1 512 347 9300
Fax: +1 512 347 9301
Email: info@lifesize.com
www.lifesize.com

EMEA: LifeSize Communications
Toll-Free Europe
00800 999 09 799

APAC: LifeSize Communications
Hong Kong
Phone: +852 8239 3695